



GERBER

VITREOUS CHINA
TOILET
25-642

LAVATORIES

TOILETS

BIDETS / URINALS

CAST IRON

COMMERCIAL Washdown Back Spud Bowl

10" Rough-in

Features:

- 1.28/1.6gpf compatible (4.8/6.0 Lpf)
- Round Front Bowl
- Siphon Jet
- For Flushometer Valve - Specify 2" x 1 1/4" or 2" x 1 1/2" Spud
- Large Trapway

Dimensions:


Height14 7/8"
Width 14 1/2"
Depth 19 3/4"
Rough-in10"
Water Surface from Rim6 5/8"
Trapway (min).....1 1/2"
Water Surface 8" x 7"
Water Seal 2 1/2"
Shipping Weight39 lbs

Warranty

- Limited Lifetime Warranty



Seat not included

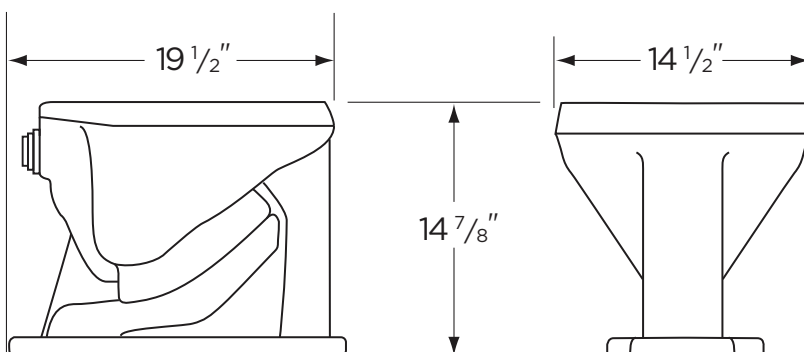

RECOMMENDED STATIC WATER
PRESSURE FOR PLUMBING
FIXTURES IS 20 - 80 PSI STATIC
PER ANSI STANDARDS A112.19.2M
APPENDIX B.

THIS FIXTURE QUALIFIES
ACCORDING TO ASME TEST
PROCEDURES AS A HIGH
EFFICIENCY WATER CLOSET
WITH AN AVERAGE CONSUMPTION
OF 1.28 gpf (4.8 Lpf) OR LESS.



HIGH-EFFICIENCY TOILETS
HET

www.gerberonline.com

Job Name	
Date	
Model Specified	
Quantity	
Customer	
Contractor	
Architect/engineer	




GERBER

1.28 gpf (4.8 Lpf) HIGH EFFICIENCE
COMMERCIAL BOWL

25-642

Washdown Back Spud Bowl, 10" Rough-in

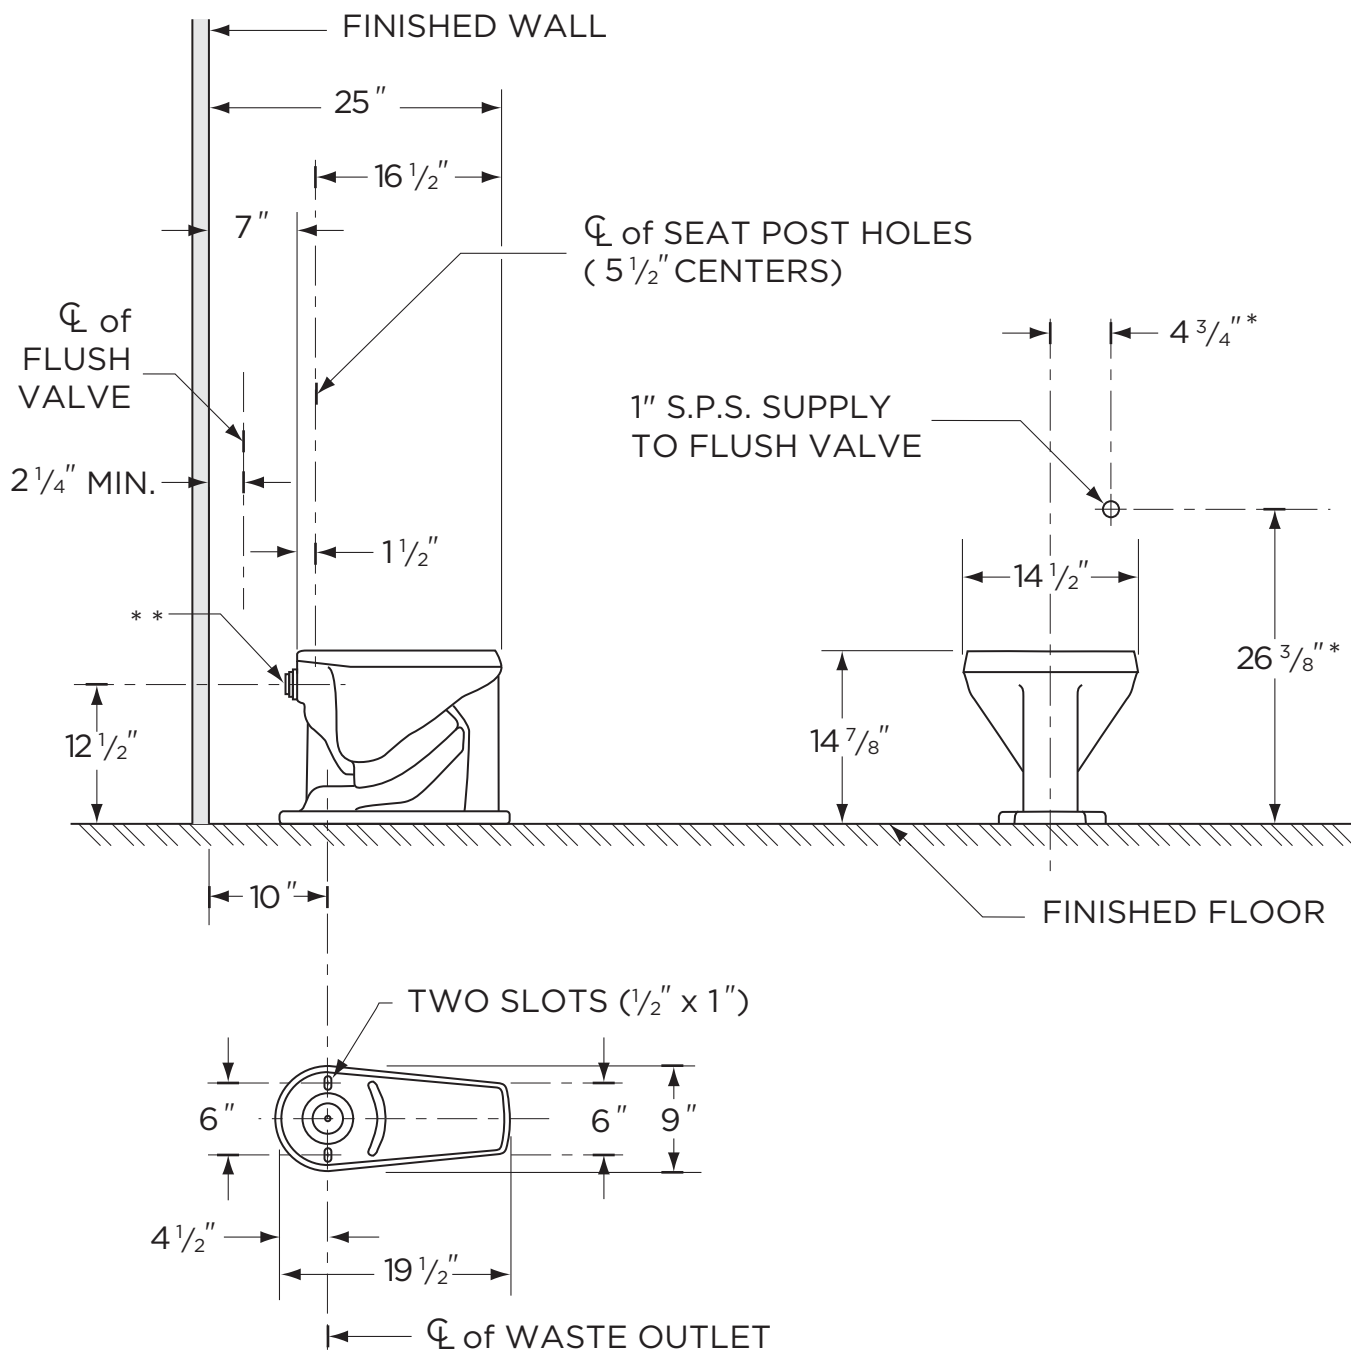

NOTES:

All dimensions are in inches.

*This measurement may vary.

Use flush valve manufacturer's recommended rough-in.

**Normally supplied with 2" x 1-1/2" spud. Specify if 2" x 1-1/4" spud is desired.

Illustrations may not be drawn to scale.

IMPORTANT:

Dimensions of fixtures are nominal and may vary within the range of tolerances established by ASME Standard A 112.19.2.

THIS FIXTURE QUALIFIES ACCORDING TO ASME TEST PROCEDURES AS A HIGH EFFICIENCE WATER CLOSET WITH AN AVERAGE CONSUMPTION OF 1.28 gpf (4.8 Lpf) OR LESS.