

MOEN®

Specifications

DESCRIPTION

- Chrome plated metal construction
- 1/2" connections: IPS - exterior, CC - interior
- Includes showerhead, arm and flange

OPERATION

- Dual control
- Lever handles
- Volume and temperature controlled by rotating handles toward spout to open

FLOW

- Showerhead is designed to deliver 1.75 gpm (6.6 L/min) max.
(for models manufactured after 3/1/18)
- Showerhead is designed to deliver to 2.5 gpm (9.5 L/min) max.
(for models manufactured before 3/1/18)

CARTRIDGE


- 1224 cartridge design
- Nonmetallic and stainless steel materials

STANDARDS


- Third party certified to: WaterSense®, ASME A112.18.1/CSA B125.1, and all applicable requirements referenced therein
- Showerhead products marked with 1.75 gpm are compliant with WaterSense®, and with California water efficiency regulations
- ADA ♿ for lever handles
- Meets WaterSense® criteria
- Meets New York City Local Law No. 57

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
 - 10 year limited warranty when used in a multifamily installation
 - 5 year limited warranty when used in a commercial installation
- Visit www.moen.com/support for complete details and limitations

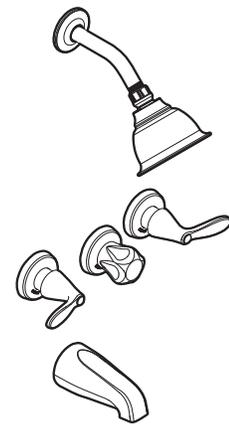

Adler™
Three-Handle Tub/Shower Valve
Model: 82663

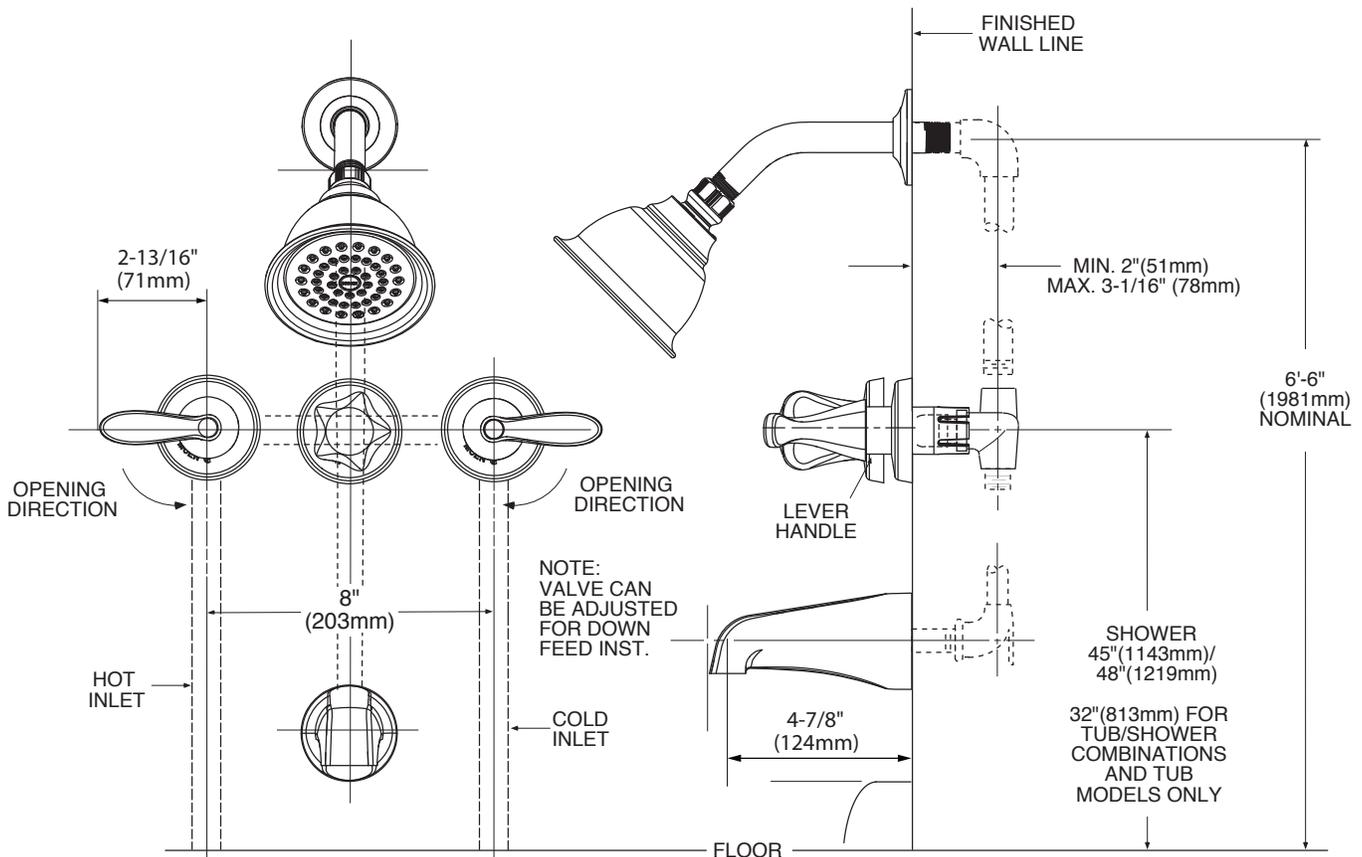

CRITICAL DIMENSIONS

(DO NOT SCALE)